


Dual Directional Couplers

C2-A57, 40dB Dual Directional Coupler PIM optimized
Two section, dual directional airline (slabline) coupler.
7-16 DIN

Model	C2-A57	
Frequency range	800 - 2170 MHz	
Coupling Value	40 dB +/- 0.75 dB	
Directivity	TYP	MIN
	25 dB	20 dB
Insertion Loss	MAX	
	800 MHz	0.03 dB
2170 MHz	0.05 dB	
VSWR and (Return Loss) Input and Output Coupled Port	TYP	MIN
	1.07 (30 dB) 1.16 (22 dB)	1.12 (25 dB) 1.3 (17.7 dB)
Impedance	50 Ω	
Intermodulation IM3 (2 x 43 dBm carrier)	165 dBc	
Max. Power	1500 W Avg, 3KW Peak	
Termination Max. Power	3 W Avg	
Connectors	7-16 DIN male/female and SMA female	
Material: Housing Inner Conductor & Connectors	Aluminum, Conversion Coating Brass, Silver Plated	
DC continuity	RF and DC	
	RF only	
Weight approx	1.2 kg (2.64 lb)	

- 1500 W average power
- Low VSWR and Loss
- High reliability, Low PIM
- ROHS Compliant

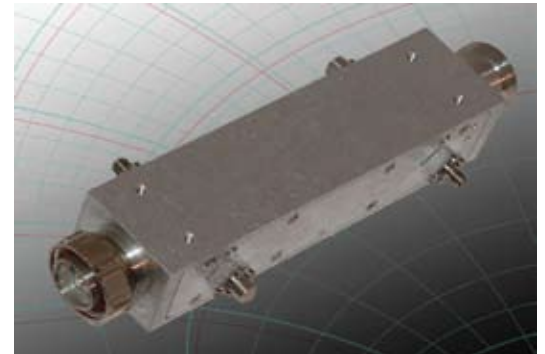

R&D Microwaves LLC patent pending, two section, airline, Dual Directional Coupler covering wireless applications in the 800-2170 MHz band. Available with 7-16 DIN(m-f) connectors, this design offers RF power ratings of 1500 Watts (3.0 kW peak). Insertion loss is less than 0.05 dB, RL is better than 25 dB, coupling is 40 dB with directivity better than 20 dB across the entire band. These couplers are ideal for antenna power monitoring applications in base station installations. Custom connectors configuration and enhanced directivity models available.

Made in USA.

